


SP35

GNSS RTK SYSTEM

**Camera-assisted
Laser Surveying**

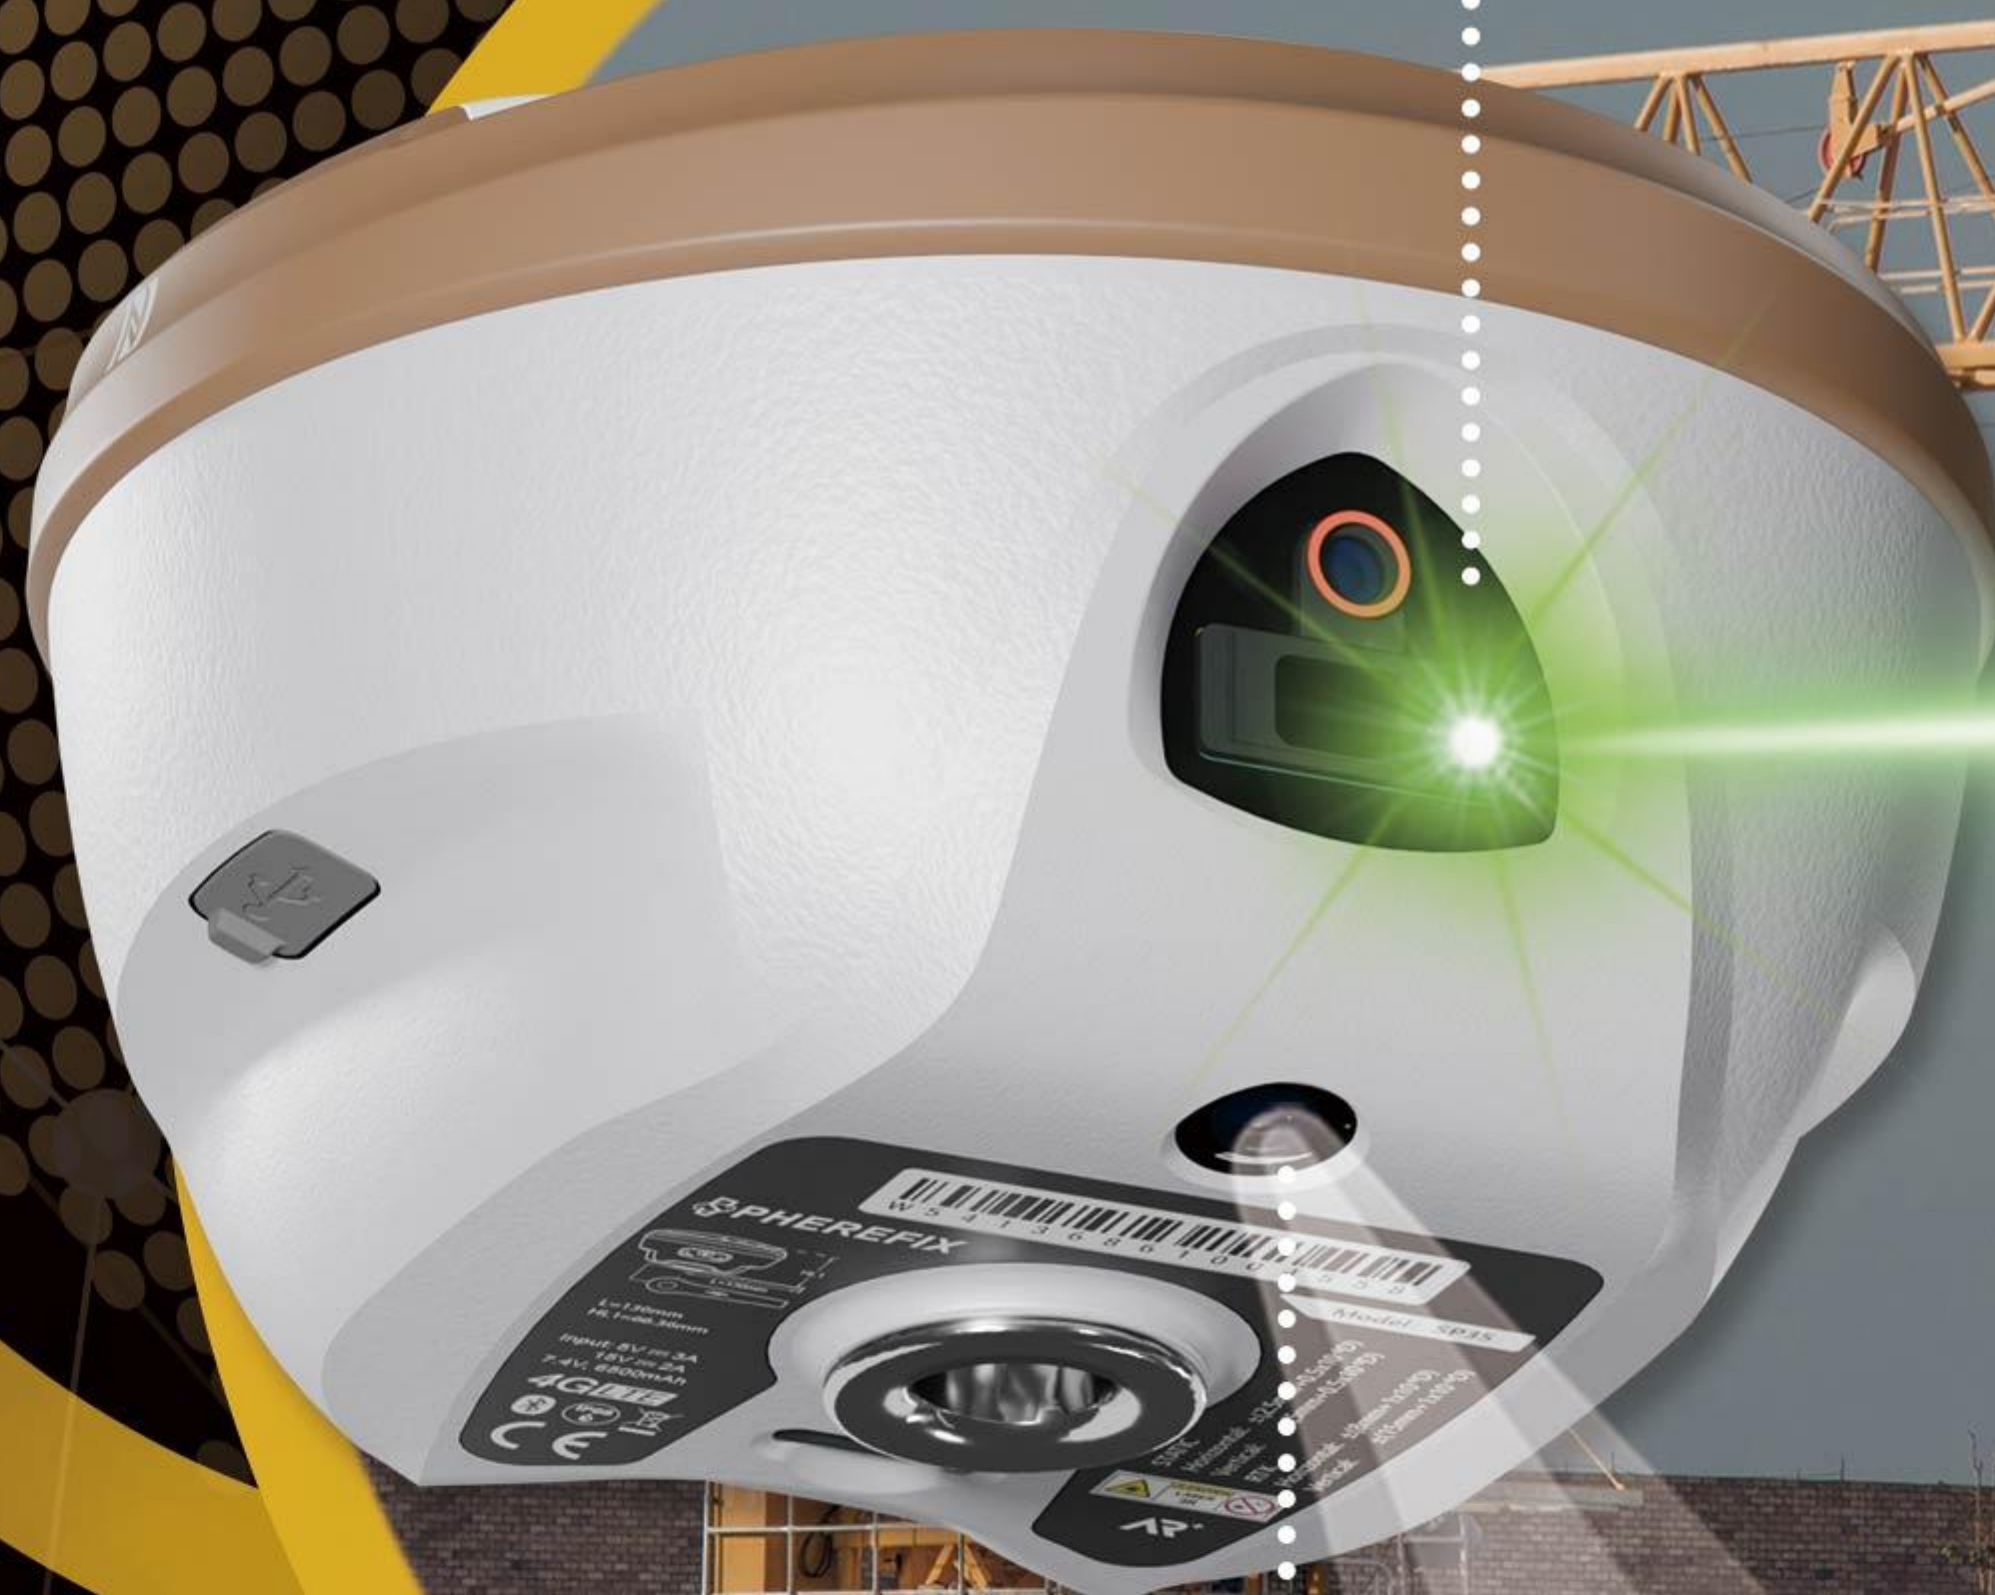

AR Real-scene Stakeout

SP35 GNSS Receiver

SP35 is a compact, portable multi-band GNSS receiver featuring integrated AR real-scene stake out and laser surveying modules. Its high-precision positioning module tracks all-frequency satellite signals for centimeter-level accuracy. With full-network 4G, Bluetooth, Wi-Fi, and 1.5W LoRa Radio, it extends communication range significantly. The built-in tightly coupled IMU and camera-assisted laser measurement, combined with AR technology, enable visualized real-time surveying in complex environments.



HEIGHT	DIAMETER	WEIGHT
86mm	134mm	780g

Receive all satellite signals



SP35 integrates high-precision positioning module, configures 1408 high-speed channels, supports BDS B1I, B2I, B3I, B1C, B2a, B2b(PPP-B2b), GPS L1C/A, L1C, L2C, L5, GLONASS L1, L2, L3, Galileo E1, E5a, E5b, E6(PPP-E6), QZSS L1, L2, L5, SBAS and NavIC(IRNSS).

AR real-scene stakeout



Professional ultra-wide-angle camera, providing high-definition real-scene staking function, and more convenient real-scene stakeout application, makes your stakeout easier and more intuitive.

Camera-assisted Laser surveying



SP35 integrates a camera-assisted high-precision millimeter-grade laser ranging module with high-accuracy IMU, expanding measurement capabilities to operate free from complex environmental constraints.

Lightweight & Portable Design



Combining a magnesium alloy shell and plastic top cover with compact internal layout, SP35 achieves an ultra-light 780g weight. Engineered for field use, it maintains accuracy while enhancing field mobility.



GNSS

Characteristic



- ARM Cortex-A7
- Linux intelligent system



- BDS ,GPS ,GLONASS, Galileo ,QZSS, SBAS, NavIC
- 4G, Radio, Bluetooth, WiFi



- Centimeter level positioning
- Positioning accuracy of *less than 2cm* within the tilt range of 60°



- High-capacity lithium battery
- Ultra long battery endurance



C100T Data Controller

C100T control terminal is a versatile data controller crafted specifically for the surveying sector. It boasts an outstanding battery life of up to 18 hours. Its 5.45-inch display is readable in direct sunlight, and with an IP68 protection rating, it can withstand various harsh outdoor conditions. The powerful 8-core processor and Android 11 operating system ensure that the C100T operates efficiently and smoothly, and it is compatible with multiple measurement software applications, facilitating surveying tasks.



Key Features

- 5.45-inch sunlight readable HD touch screen
- 8-core 2.0GHz CPU
- Android 11 operating system
- 4GB RAM + 64GB ROM
- 13MP rear camera
- IP68 certified grade, water/shock/dust proof
- 9000mAh
- Wi-Fi, Bluetooth, Network and 4G



ITEM		SPECIFICATION	REMARKS
HARDWARE SYSTEM		ARM Cortex-A7	
OS		Linux	
GNSS	GPS	L1C/A, L1C,L2P(Y), L2C,L5	Support PPP-B2b Support PPP-E6 Support SBAS
	GLONASS	L1, L2, L3	
	BDS	B1I, B2I, B3I, B1C, B2a, B2b	
	GALILEO	E1, E5a, E5b, E6	
	QZSS	L1, L2, L5	
	SBAS	L1	Requires latest firmware support
	NavIC(IRNSS)*	L5	
	Channel	1408 channels	
	Data format	NMEA-0183	
	Correction I / O Protocol	RTCM3.X	
	Data update frequency	≤20Hz	
	Recapture Time	<1s	
	Cold Boot	<40s	
	RTK Initialization Time	≤10s	
	Internal noise level	≤1mm	
	Phase Center Offset	≤2.5mm	
POSITIONING ACCURACY	Single(RMS)	Horizontal: 1.5m; Vertical: 2.5m	
	DGPS(RMS)	Horizontal: 0.4m; Vertical: 0.8m	
	RTK(RMS)	Horizontal: ±(8mm+1ppm); Vertical: ±(15mm+1ppm)	
	Time Accuracy(RMS)	20ns	
	Static Accuracy(RMS)	Horizontal: ±(2.5mm+1ppm); Vertical: ±(5mm+1ppm)	
	Speed Accuracy(RMS)	0.03m/s	
	Tilt compensation Accuracy (within 60°)	<2cm	
	AR Stakeout	Horizontal: ± (8mm+1ppm) Vertical: ± (15mm+1ppm)	
	Laser Surveying	The three-dimensional error of laser tilt surveying within 5m distance is ≤2.5cm	
SYSTEM	Bluetooth	BR+EDR+BLE	
	NFC	Support	
	WIFI	802.11 b/g/n/ac	
	Network	LTE FDD: B1/2/3/4/5/7/8/18/19/20/25/26/28 LTE TDD: B38/39/40/41 WCDMA: B1/2/4/5/6/8/19 GSM: B2/3/5/8	
	Data Radio	Transceiver station Frequency: 410~470MHz Power: 0.5W/1.5W Air baud rate: 4800, 9600, 19200 Protocol: TRIMTALK, TRIMMK3, SOUTH, TRANSEOT, SATEL, LORA	
	Storage	8GB	
	AR Camera	Support AR real scene stakeout Sensor Size: 1/2.8 inch Aperture: f/2.5 Pixel: 1920*1080px Field of view: 69.3°±3° Distortion: <0.38%	
	Laser Aiming Camera	Sensor Size: 1/3.06 inch Aperture: f/2.9 Pixel: 4224*3200px Angle of view: D: 44° H: 35° V: 26.5° Distortion: <1%	
	Battery	7.4V, 6500mAh	
	Battery Endurance	More than 16 hours (Typical, Rover, GSM)	
BATTERY	Charge	Support USB PD 12V/2A, USB DCP 5V/3A	2P2S TBD
ENVIRONMENT	Working Temperature	-30℃~+65℃	
	Storage Temperature	-40℃~+85℃	
	Anti-vibration	Resistant to 2m drop with pole at room temperature	
	Protection	IP68	
PHYSICAL	Material	Magnesium alloy shell+ABS/PC plastic top cover	
	Dimension	Φ134mm*86mm	
	Weight	≤0.78Kg	

► Manufacturers may update parameters at any time, please refer to the latest product information.