

# SP35Pro

GNSS RTK SYSTEM

○ **Photogrammetry**



○ **AR Real-scene Stakeout**

# SP35Pro GNSS Receiver

SP35Pro is a multi-functional GNSS receiver that integrates AR and Photogrammetry modules. It has a built-in high-precision positioning module, which supports the tracking of satellite signals at all frequency points. The device is completely equipped with 4G Full-netcom, Bluetooth, WIFI, and a built-in 1.5W LoRa radio. Its high-precision inertial navigation module integrates Photogrammetry and AR real-scene stakeout, greatly expanding the boundaries of surveying & mapping.



HEIGHT  
86mm

DIAMETER  
134mm

WEIGHT  
770g

## Receive all satellite signals



SP35Pro integrates high-precision positioning module, configures 1408 high-speed channels, supports BDS B1I, B2I, B3I, B1C, B2a, B2b(PPP-B2b), GPS L1C/A, L1C, L2C, L5, GLONASS L1, L2, L3, Galileo E1, E5a, E5b, E6(PPP-E6), QZSS L1, L2, L5, SBAS and NavIC(IRNSS).

## AR real-scene stakeout



Professional ultra-wide-angle camera, providing high-definition real-scene staking function, and more convenient real-scene stakeout application, makes your stakeout easier and more intuitive.

## Photogrammetry




SP35Pro is equipped with a 1/2.6-inch high-definition wide-angle camera, integrated with high-precision inertial navigation algorithms, and combined with a high-performance Android controller to achieve high-precision Photogrammetry.

## Lightweight & Portable Design



Combining a magnesium alloy shell and plastic top cover with compact internal layout, SP35Pro achieves an ultra-light 770g weight. Engineered for field use, it maintains accuracy while enhancing field mobility.

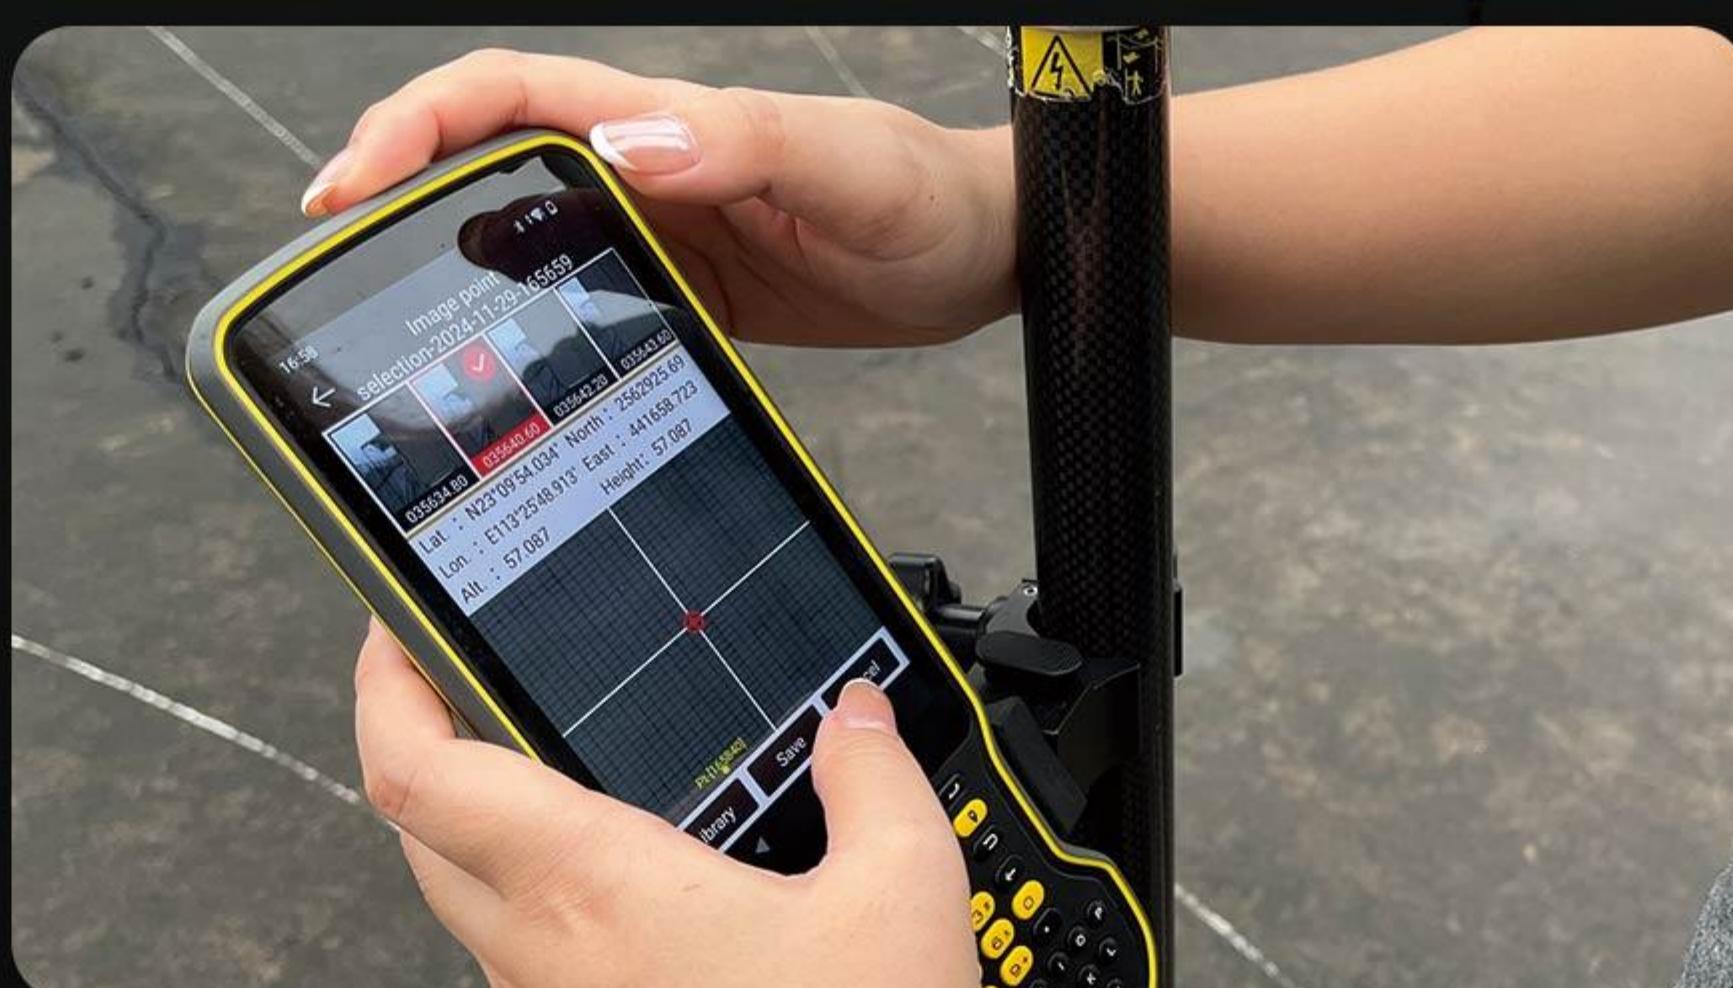

# Characteristic



- ARM Cortex-A7
- Linux intelligent system



- BDS ,GPS ,GLONASS, Galileo ,QZSS, SBAS, NavIC
- 4G, Radio,Bluetooth,WiFi



- Centimeter level positioning
- Positioning accuracy of *less than 2cm* within the tilt range of 60°



- High-capacity lithium battery
- ultra long battery endurance



# C500 Data Controller

C500 control terminal is a new Android 12 data collector launched by Spherefix, using Qualcomm's latest industrial grade processor. Equipped with a standard all English keyboard and a 5.5-inch 500nit display screen made of Gorilla glass, it is clear and easy to read in sunlight. In addition, C500 is equipped with Bluetooth 5.0, dual band 2.4G/5G WiFi, and a 4G modem that supports global networks. The built-in 9000mAh battery provides long-lasting endurance, and IP68 protection makes C500 perform well in challenging environments, making data collection tasks easier and more efficient.



# Key Features

- 5.5-inch sunlight readable HD touch screen
- 8-core 2.0GHz CPU
- Android 12 operating system
- 4GB RAM + 64GB ROM
- 13MP rear camera
- IP68 certified grade, water/shock/dust proof
- 9000mAh(Support Rapid Charing)
- Wi-Fi, Bluetooth and 4G
- Type-C (USB3.0 Supports OTG) .



ITEM	SPECIFICATION	REMARKS
HARDWARE SYSTEM		
OS	ARM Cortex-A7 Linux	
GNSS	GPS	L1C/A, L1C,L2P(Y), L2C,L5
	GLONASS	L1, L2, L3
	BDS	B1I, B2I, B3I, B1C, B2a, B2b
	GALILEO	E1, E5a, E5b, E6
	QZSS	L1, L2, L5
	SBAS	L1
	NavIC(IRNSS)*	L5
	Channel	1408 channels
	Data format	NMEA-0183
	Correction I / O Protocol	RTCM3.X
POSITIONING ACCURACY	Data update frequency	≤20Hz
	Recapture Time	<1s
	Cold Boot	<40s
	RTK Initialization Time	≤10s
	Internal noise level	≤1mm
	Phase Center Offset	≤2.5mm
	Single(RMS)	Horizontal: 1.5m; Vertical: 2.5m
	DGPS(RMS)	Horizontal: 0.4m; Vertical: 0.8m
SYSTEM	RTK(RMS)	Horizontal: ±(8mm+1ppm); Vertical: ±(15mm+1ppm)
	Time Accuracy(RMS)	20ns
	Static Accuracy(RMS)	Horizontal: ±(2.5mm+1ppm); Vertical: ±(5mm+1ppm)
	Speed Accuracy(RMS)	0.03m/s
	Tilt compensation Accuracy (within 60°)	<2cm
	AR Stakeout	Horizontal: ± (8mm+1ppm) Vertical: ± (15mm+1ppm)
	Laser Surveying	The three-dimensional error of laser tilt surveying within 5m distance is ≤2.5cm
	Bluetooth	BR+EDR+BLE
BATTERY	NFC	Support
	WIFI	802.11 b/g/n/ac
	Network	LTE FDD: B1/2/3/4/5/7/8/18/19/20/25/26/28 LTE TDD: B38/39/40/41 WCDMA: B1/2/4/5/6/8/19 GSM: B2/3/5/8
	Data Radio	Transceiver station Frequency: 410~470MHz Power: 0.5W/1.5W Air baud rate: 4800, 9600, 19200 Protocol: TRIMTALK, TRIMMK3, SOUTH, TRANSEOT, SATEL, LORA
	Storage	8GB
	AR Camera	Support AR real scene stakeout Sensor Size: 1/2.8 inch Aperture: f/2.5 Pixel: 1920*1080px Field of view: 69.3°±3° Distortion: <0.38%
	Photogrammetry Camera	Supports photogrammetry Sensor Size: 1/2.6 inch Focal length: 3.27mm Aperture: f/2.8 Pixel: 1920*1080px Angle of view: D: 83° H: 72° V: 51° Distortion: <0.5%
	Battery	7.4V, 6500mAh
ENVIRONMENT	Battery Endurance	More than 16 hours (Typical, Rover, GSM)
	Charge	Support USB PD 12V/2A, USB DCP 5V/3A
	Working Temperature	-30°C~+65°C
	Storage Temperature	-40°C~+85°C
PHYSICAL	Anti-vibration	Resistant to 2m drop with pole at room temperature
	Protection	IP68
	Material	Magnesium alloy shell+ABS/PC plastic top cover
Dimension		Φ134mm*86mm
Weight		≤0.77Kg

► Manufacturers may update parameters at any time, please refer to the latest product information.